

Operation condition


Insulation Resistance	250M min (at 500VDC)	Item 7 of IEC 60255-5
Dielectric Strength Between contacts Between contact and coil	50Hz 750V 50Hz 1500V	Item 6 of IEC 60255-5 Item 6 of IEC 60255-5
Shock resistance	100m/s ² 11ms	IEC 68-2-27 Test Ea
Vibration resistance	10Hz~55Hz double amplitude 1.5mm	IEC 68-2-6 Test Fc
Terminals strength	5N	IEC 68-2-21 Test Ua1
Solderability	260 5 5s 0.5s	IEC 68-2-20 Test Ta method 1
Ambient Temperature	-55 ~105	
Relative Humidity	85% (at 40)	IEC 68-2-3 Test Ca
Mass	9.5g	

Safety approvals


Safety approval	UL	VDE	CQC
Load	10A/250VAC,277VAV 105°C NO 12A/250VAC,277VAC 105°C NO 15A/125VAC 105°C NO	10A/250VAC 105°C NO 12A/250VAC 105°C NO	10A/250VAC 105°C NO 12A/250VAC 105°C NO

Dimensions


mm /inch

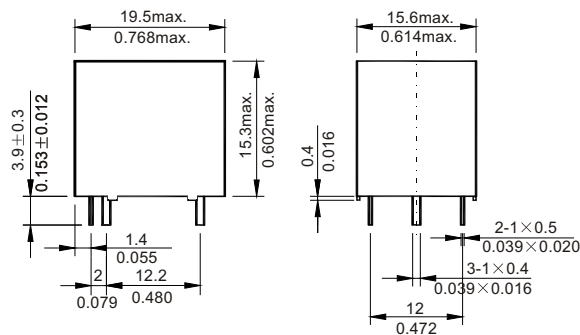

Dimensions



Mounting (Bottom view)



Wiring diagram(Bottom view)

- NOTES 1).Dimensions are in millimeters.
2).Inch equivalents are given for general information only.

Reference Data

