



23×16.1×10(1A)
22.3×16.6×11(1C)

NT76

UL US E174722 R50126372

Features

- Super light in weight.
- High sensitivity.
- 16A switching capacity.
- PC board mounting.

Ordering Information

NT76 - A - S - 12VDC

1 2 3 4

1 Part number: NT76
2 Contact arrangement: A:1A; C:1C
3 Enclosure: S: Wash tight; Z: Flux proof

4 Coil rated voltage(V): DC:5,6,9,12,18,24,48

Contact Data

Contact Arrangement	1A(SPSTNO) 1C(SPDT(B-M))	
Contact Material	AgSnO ₂	
Contact Rating	NO: 16A/250VAC, 30VDC NC: 10A/250VAC,30VDC	
Max. Switching Power	480W 4000VA	
Max. Switching Voltage	30VDC 277VAC	Max. Switching Current:16A
Contact Resistance	≤50mΩ	Item 4.12 of IEC 61810-7
Electrical Endurance	1×10 ⁵	Item 4.30 of IEC 61810-7
Mechanical Endurance	1×10 ⁷	Item 4.31 of IEC 61810-7

Coil Parameter

Coil voltage VDC		Coil resistance Ω ± 10%	Pick-up voltage VDC(max) (75% of rated voltage)	Drop-out voltage VDC(min) (5% of rated voltage)	Coil power W	Operate time ms	Release time ms
Rated	Max.						
1A							
5	6.5	125	3.75	0.25	0.20	≤10	≤5
6	7.8	180	4.50	0.30			
9	11.7	405	6.75	0.45			
12	15.6	720	9.00	0.60			
18	23.4	1620	13.5	0.90			
24	31.2	2880	18.0	1.20			
1C							
5	6.5	56	3.75	0.25	0.45	≤10	≤5
6	7.8	80	4.50	0.30			
9	11.7	180	6.75	0.45			
12	15.6	320	9.00	0.60			
18	23.4	720	13.5	0.90			
24	31.2	1280	18.0	1.20			
48	52.8	5120	36.0	2.40			

Notes: 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
2.Pick-up and drop-out voltage are for test purposes only and are not to be used as design criteria.

Characteristics


Insulation Resistance	100MΩ min (at 500VDC)	Item 4.11 of IEC 61810-7
Dielectric Strength Between Open Contacts Between Contact and Coil	1000VAC 1min 2500VAC 1min	Item 4.9 of IEC 61810-7
Shock Resistance	98m/s ² 11ms	Item 4.26 of IEC 61810-7
Vibration Resistance	10Hz~55Hz Double amplitude 1.5mm	Item 4.28 of IEC 61810-7
Terminals Strength	10N	Item 4.24 of IEC 61810-7
Ambient Temperature	-40℃~85℃	
Relative Humidity	5%~85%	Item 4.16 of IEC 61810-7
Weight (Approx.)	10g	Item 4.7 of IEC 61810-7

Safety Approvals

Safety approval	UL&CUR	TüV	CQC
Load	NO:16A/250VAC;NC:10A/250VAC	16A/250VAC,14VDC	16A/250VAC


Dimensions

mm

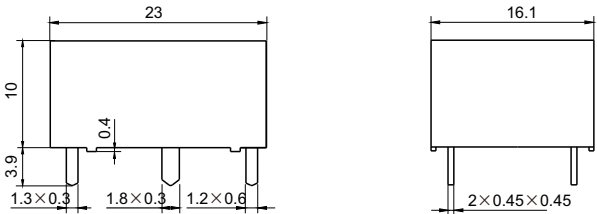

1A

Dimensions

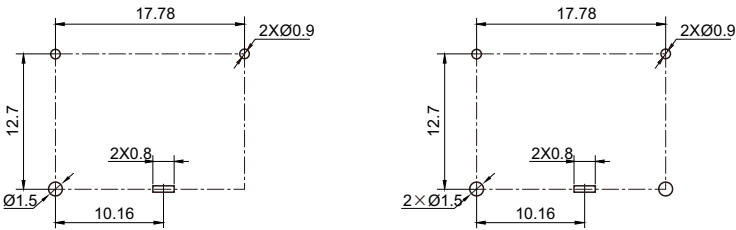

1A

1C

Mounting (Bottom view)



1A

1C

Wiring diagram(Bottom view)

Remark: In case of no tolerance shown in outline dimension: outline dimension≤1mm,tolerance should be ±0.2mm ; outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.