

NT73-4T



19.5×15.6×15.3

c  us E169380

Features

- Small size, light weight and heavy switching power.
- Ambient temperature can achieve 105℃.
- Low coil power consumption.
- PC board mounting is available.
- The parts with IEC 60335-1 compliance is available.
- Suitable for automatic system, communication device, home appliance application, electromechanical equipment and so on.

Ordering Information

NT73-4T - C - S 12 DC12V 0.36

1 2 3 4 5 6

1 Part number: NT73-4T
2 Contact arrangement: A:1A; C:1C
3 Enclosure: S: Wash tight; NIL: Flux proof

4 Contact rating: 10:10A; 12:12A
5 Coil rated voltage(V): DC:5,6,9,12,24
6 Coil power: 0.36:0.36W

Contact Data

Contact Arrangement	1A(SPSTNO) 1C(SPDT(B-M))	
Contact Material	AgSnO ₂	
Contact Rating ¹⁾	10A/250VAC,277VAC; 12A/250VAC,277VAC; 15A/125VAC	
Max. Switching Power	3000VA	
Max. Switching Voltage	277VAC	Max. Switching Current:15A
Contact Resistance	≤100mΩ	Item 4.12 of IEC 61810-7
Electrical Endurance	1×10 ⁵ 10A/250VAC,277VAC 105℃ 6×10 ⁴ 12A/250VAC,277VAC 105℃ 2×10 ⁴ 15A/125VAC 105℃ Item 4.30 of IEC 61810-7	
Mechanical Endurance	1×10 ⁷ Item 4.31 of IEC 61810-7	

Notes: 1)The vent hole should be opened when testing enclosed relay.

Coil Parameter

Coil voltage VDC		Coil resistance Ω ± 10%	Pick-up voltage VDC(max) (75%of rated voltage)	Drop-out voltage VDC(min) (10% of rated voltage)	Coil power W	Operate time ms	Release time ms
Rated	Max.						
5	6.5	70	3.75	0.5	0.36	≤10	≤5
6	7.8	100	4.50	0.6			
9	11.7	225	6.75	0.9			
12	15.6	400	9.00	1.2			
24	31.2	1600	18.0	2.4			

Notes: 1. The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
2. Pick-up and drop-out voltage are for test purposes only and are not to be used as design criteria.

Characteristics


Insulation Resistance	250MΩ min (at 500VDC)	Item 4.11 of IEC 61810-7
Dielectric Strength	750VAC 1min	Item 4.9 of IEC 61810-7
Between Open Contacts	1500VAC 1min	
Between Contact and Coil		
Shock Resistance	98m/s ² 11ms	Item 4.26 of IEC 61810-7
Vibration Resistance	10Hz~55Hz Double amplitude 1.5mm	Item 4.28 of IEC 61810-7
Terminals Strength	5N	Item 4.24 of IEC 61810-7
Ambient Temperature	-55℃~105℃	
Relative Humidity	5% to 85%	Item 4.16 of IEC 61810-7
Weight(Approx.)	9.5g	Item 4.7 of IEC 61810-7

Safety Approvals

Safety approval	UL&CUR	CQC
Load	NO: 10A/250VAC,277VAC 105℃ NO: 12A/250VAC,277VAC 105℃ NO: 15A/125VAC 105℃	10A/250VAC 105℃ 12A/250VAC 105℃

Dimensions

mm

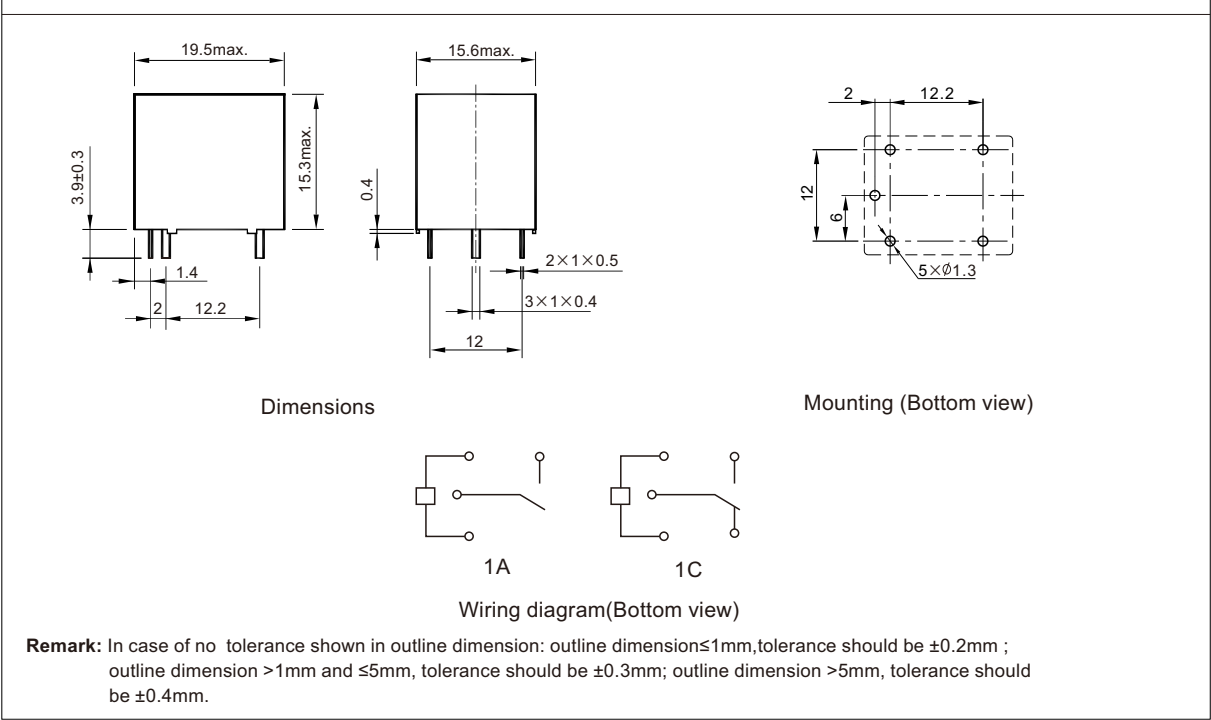

Reference Data

