


# NT74



28.5×10.1×12.5

 40019280

 <sub>us</sub> E169380

## Features

- 10A switching capability.
- Small size, light weight.
- Low coil consumption.
- PC board mounting.
- Product in accordance to IEC 60335-1 available.
- Suitable for household electrical appliances, automation system, electrical equipment, instrument, meter telecommunication facilities and remote control facilities.

## Ordering Information

**NT74 1C S S G 10 DC12V**

1 2 3 4 5 6 7

1 Part number: NT74

2 Contact arrangement: 1A:1A;1C:1C

3 Enclosure: S: Wash tight; Z: Flux proof

4 Contact material: S: AgSnO<sub>2</sub>; N: AgNi

5 Contact plating: Nil:Standard; G:Gold plated

6 Contact rating: 8A,10A/250VAC,30VDC

7 Coil rated voltage(V): DC:5,6,9,12,18,24,48

## Contact Data

Contact Arrangement	1A(SPSTNO) 1C(SPDT(B-M))	
Contact Material	AgSnO <sub>2</sub> AgNi	
Contact Rating	8A,10A/250VAC,30VDC 3A/230VAC,24VDC 85°C (AgSnO <sub>2</sub> ) 240VAC,D300 40°C (AgSnO <sub>2</sub> )	
Max. Switching Power	300W 2500VA	
Max. Switching Voltage	300VDC 440VAC	Max. Switching Current:10A
Contact Resistance	≤100mΩ	Item 4.12 of IEC 61810-7
Electrical Endurance	1×10 <sup>5</sup>	Item 4.30 of IEC 61810-7
Mechanical Endurance	1×10 <sup>7</sup>	Item 4.31 of IEC 61810-7

**Notes:** For gold plated version, the min. switching current and min. switching voltage is 50mA/6VDC; for non gold plated version (standard type),the min. switching current and min. switching voltage is 100mA/6VDC.

## Coil Parameter

Dash numbers	Coil voltage VDC		Coil resistance Ω ± 10%	Pick-up voltage VDC(max) (70%of rated voltage )	Drop-out voltage VDC(min) (10% of rated voltage)	Coil power W	Operate time ms	Release time ms
	Rated	Max.						
005-220	5	6.5	113	3.5	0.5	0.22	≤10	≤5
006-220	6	7.8	164	4.2	0.6			
009-230	9	11.7	360	6.3	0.9	0.23	≤10	≤5
012-230	12	15.6	620	8.4	1.2			
018-250	18	23.4	1295	12.7	1.8	0.25	≤10	≤5
024-250	24	31.2	2350	16.8	2.4			
048-290	48	62.4	8000	33.6	4.8	0.29	≤10	≤5

**Notes:** 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.  
2.Pick-up and drop-out voltage are for test purposes only and are not to be used as design criteria.

## Operation condition


Insulation Resistance	1000MΩ min (at 500VDC)	Item 4.11 of IEC 61810-7
Dielectric Strength Between Contacts Between Contact and Coil	1000VAC 1min 5000VAC 1min	Item 4.9 of IEC 61810-7 Item 4.9 of IEC 61810-7
Shock Resistance	Functional: NO:98m/s <sup>2</sup> NC:49m/s <sup>2</sup> Destructive:980m/s <sup>2</sup>	Item 4.26 of IEC 61810-7
Vibration Resistance	10Hz~55Hz Double amplitude NO: 1.65mm (No Coil Voltage) NC: 0.8mm	Item 4.28 of IEC 61810-7
Terminals Strength	10N	Item 4.24 of IEC 61810-7
Ambient Temperature	-40℃~85℃	
Relative Humidity	5% to 85%	Item 4.16 of IEC 61810-7
Weight(Approx.)	8g	Item 4.7 of IEC 61810-7

## Safety approvals

Safety approval	UL&CUR	VDE
Load	8A,10A/250VAC,30VDC 3A/230VAC,24VDC 85℃ (AgSnO <sub>2</sub> ) 240VAC,D300 40℃ (AgSnO <sub>2</sub> )	1C:8A/250VAC 1A:10A/250VAC

## Dimensions

mm

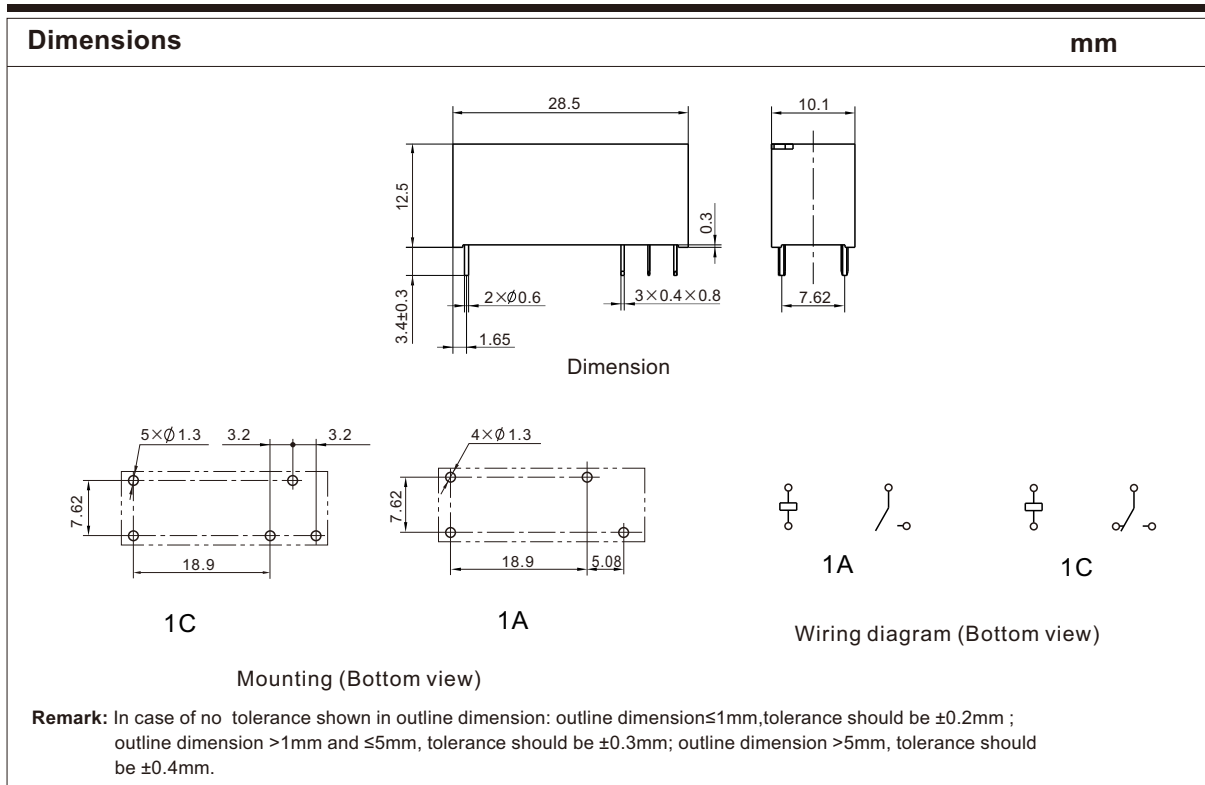

## Reference Data

